




soltec

SF ONE

The 1P tracker by Soltec




Contents subject to change without prior notice © Soltec Energías Renovables • SF ONE 1x90_23.11.22_ver01_rev01
 Monitoring & Control references on this document are subject to availability. Alternative electronics could be finally provided for your project if needed

TECHNICAL DATASHEET

MAIN FEATURES

Tracking System	Two-row Horizontal Single-Axis Tracker*
Tracking Range	±55° (optional up to 60°)
Drive System	2 Irreversible Slewing Drives, DC Motor
Power Supply	Self-powered with dedicated panel Optional: 120/240 Vac or 24 Vdc power-cable
Tracking Algorithm	Astronomical Algorithm
Communication	Full Wireless Optional: RS-485 Full Wired RS-485 cable not included in Soltec scope
Wind Resistance	Per Local Codes or site-specific specific wind studies
Land Use Features	
North-South slope	up to 15% depending on project design
East-West slope	up to 7% for linked rows, up to 15% for single row
Ground coverage ratio	Configurable. Typical range: 32-60%
Foundation	Driven Pile Ground Screw Concrete
Temperature Range	
Standard	-4°F to +131°F -20°C to +55°C
Extended	-40°F to +131°F -40°C to +55°C
Availability	>99%
Modules	Standard: 72 / 78 cells Optional: 60 Cells; Crystalline, Thin Film (Solar Frontier, First Solar and others)

*possibility of independent rows

SERVICE PLANS

- Pull out test
- Factory Support
- Onsite Advisory
- Construction
- Commissioning
- Operation & Maintenance
- Tracker Monitoring System
- Solmate Customer Care

MAINTENANCE


- Self-lubricating Bearings
- Face to Face Cleaning Mode
- Fewer parts and fastenings

WARRANTY*

- Structure 10 years
 - Motor 5 years
 - Electronics 5 years
- *extendable under quotation

- **Dy-Wind design implemented**
- **Asymmetric backtracking included as standard**
- **CPP wind tunnel proved**
- **Wire management available**

CONFIGURATION

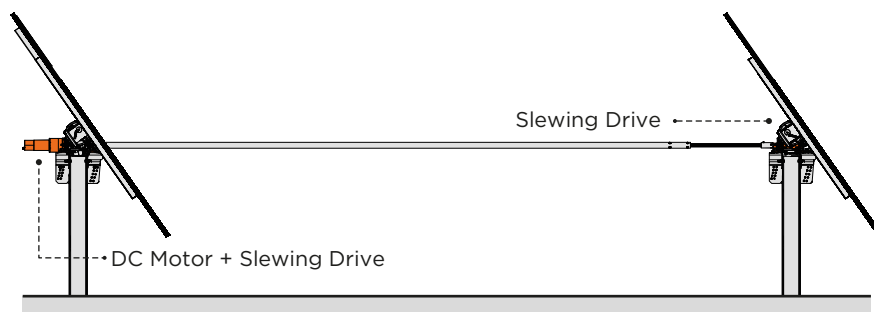


DIMENSIONS*

2x1Px90

- Length: up to 104m (341' 2")
- Axis height: 1,4 - 2,1m (4' 7" - 6' 11")
- Width: 2.1 - 2.5m (6' 11" - 8' 2.4")

*Approximate Dimensions

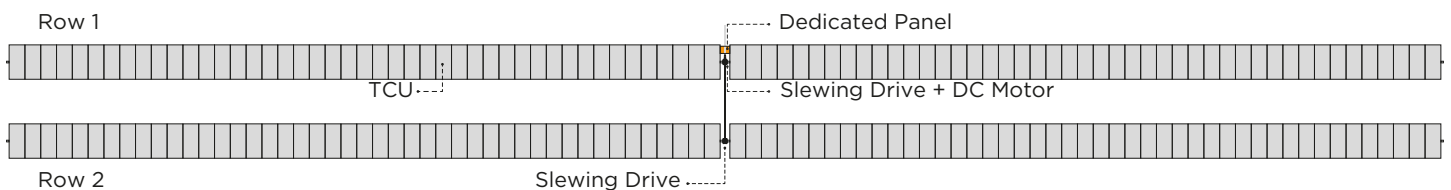

SOLTEC POWER HOLDINGS SA

CALLE GABRIEL CAMPILLO S/N POL. IND. LA SERRETA 30500, MOLINA DE SEGURA, MURCIA - ESPAÑA

SPAIN / HQ

info@soltec.com
+34 968 603 153

SPAIN / Madrid

emea@soltec.com
+34 91 449 72 03

UNITED STATES

usa@soltec.com
+1 510 440 9200

BRAZIL

brasil@soltec.com
+55 071 3026 4900

MEXICO

mexico@soltec.com
+52 1 55 5557 3144

CHILE

chile@soltec.com
+56 2 25738559

PERU

peru@soltec.com
+51 1422 7279

INDIA

india@soltec.com
+91 124 4568202

AUSTRALIA

australia@soltec.com
+61 2 9275 8806

CHINA

china@soltec.com
+86 21 66285799

ARGENTINA

argentina@soltec.com
+54 9 114 889 1476

DUBAI

dubai@soltec.com